



SECTION :A-A

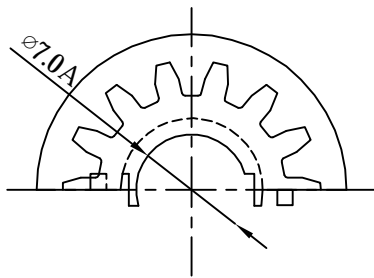

SECTION:B-B

| REVISIONS |     |      |         |         |
|-----------|-----|------|---------|---------|
| ISSUE     | SYM | DATE | DRAFTER | CHECKER |
|           |     |      |         |         |
|           |     |      |         |         |
|           |     |      |         |         |

NOTE:



樹林企業股份有限公司  
TAIWAN SHULIN ENTERPRISE CO., LTD

MODEL

ET-28 (4sec)

MATERIAL

PBT

WEB: [www.bobbin.com.tw](http://www.bobbin.com.tw)

UL RATING

UL94V-0

TOLERANCE

e-mail: [shulin@bobbin.com.tw](mailto:shulin@bobbin.com.tw)

PIN MATERIAL

\*\*\*\*\*

.X ±0.2

(TAIWAN TAIPEI) TEL: (886)2-2223-1500 FAX: (886)2-2222-4646

EDITION

2.0A

.XX ±0.15

(CHINA DONGGUAN) TEL: (86)769-7730-785 FAX: (86)769-7312-387

DATE

2003/9/15

PIN PITCH ±0.1

(CHINA SUZHOU) TEL: (86)512-6621-0580 FAX: (86)512-6621-0685

SCALE

2/1

UNIT

MM